




MF-DB155-1500-40W


100.850-3KDA	Kontor armatur 3000K
IP klasse	IP20
Volt	230 V~
Watt	40W-10W up /30W down
Lyskilde	Integreret LED, 25% uplight - 75% down.
Spredning	45° down - 105° Up
Afskærmning	Milky
RA	> 95
Dæmpbar	Dali2
CCT kelvin	3000K
Lumen	4000Lm
Mål	L1543.5*B150 *H40*D150
Materiale lampehus	Metal hvid (RAL 9010)
Materiale skærm	Blank reflektor
Gennem fortrådet	Nej
Leveres inkl. aluwire på 1.5m	



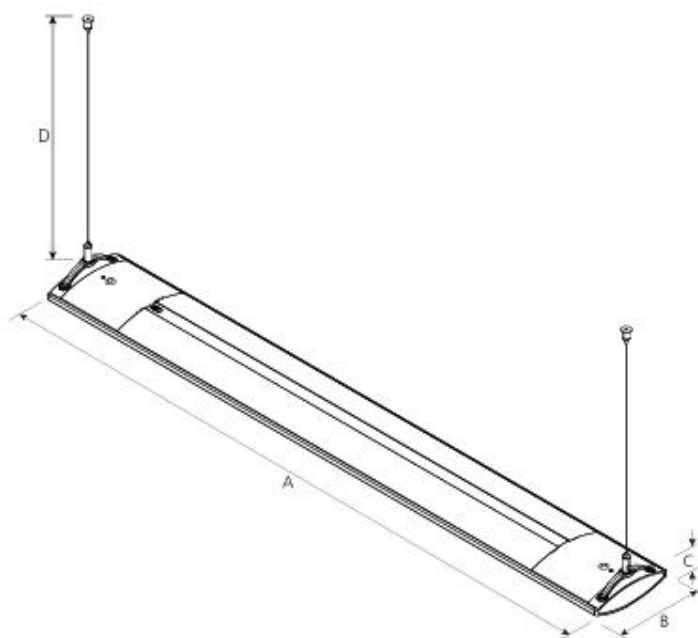




Pendant installation

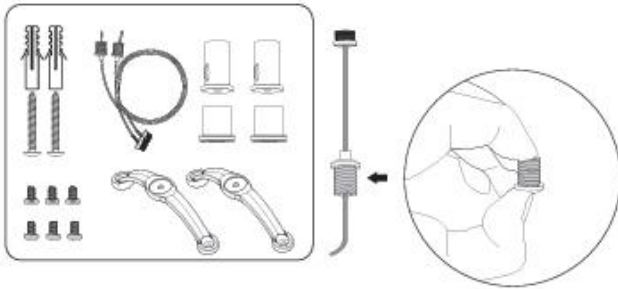


Press to adjust the length of the suspension wire




1 2

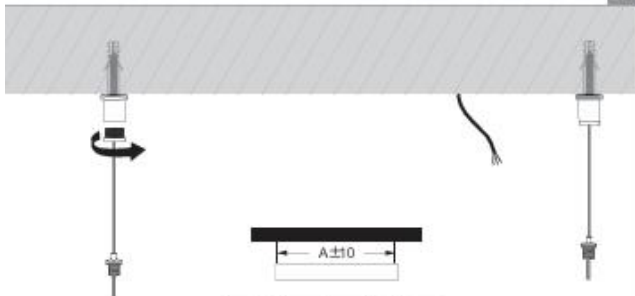

Spec	$A \pm 10$
1200mm	1126mm
1500mm	1506mm

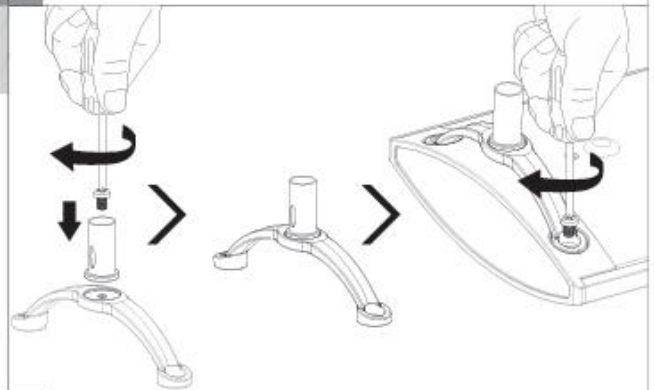

3 4

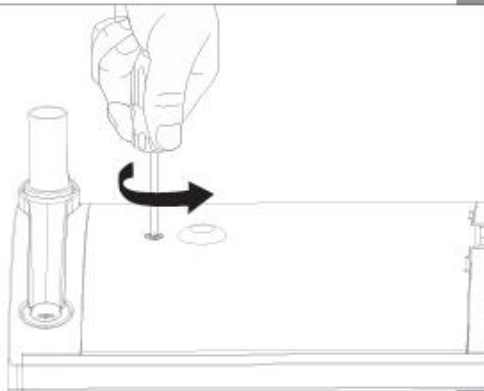

5 6

