

UFO HIGHBAY –100.238-BND / 100.238-BDA



101.246	100W – 15200LM – 4000K
Beskrivelse	LED UFO
Styring	Non dim / Dali2
Volt	100-240 V~
LED	Philips Lumileds Luxeon 3030 chip
Watt	100W
Spredning	120°
RA	➤ 85
Lumen	15200
Farvetemperatur	4000K
Lyskilde	LED, symmetrisk lysfordeling
Levetid	100.000 timer
L80/B20	>100000 at Ta=25°
Materiale	Die cast aluminium, Sort
Anvendelse	Indendørs
IP	65
Yderligere information	Godkendt til at sidde i støvet områder.
Leveres med	1.5m kabel Karabinhage for montering
Garanti	5år



RoHS



5 YEARS WARRANTY

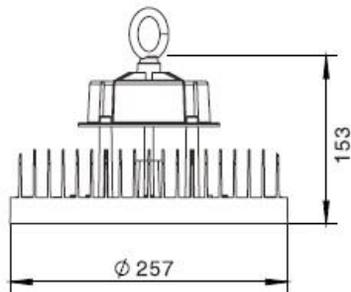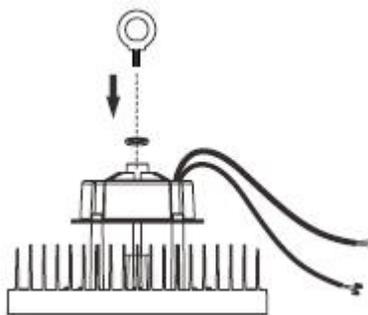

UFO HIGHBAY - 100.240-BND / 100.240-BDA



101.246	150W – 22600LM – 4000K
Beskrivelse	LED UFO
Styring	Non dim / Dali2 / 1-10V
Volt	100-240 V~
LED	Philips Lumileds Luxeon 3030 chip
Watt	150W
Spredning	120°
RA	> 85
Lumen	22600Lm
Farvetemperatur	4000K
Lyskilde	LED, symmetrisk lysfordeling
Levetid	100.000 timer
L80/B20	>100000 at Ta=25°
Materiale	Die cast aluminium, Sort
Anvendelse	Indendørs
IP	65
Yderligere information	Godkendt til at sidde i støvet områder.
Leveres med	1.5m kabel Karabinhage for montering
Garanti	5år



RoHS



5 YEARS WARRANTY

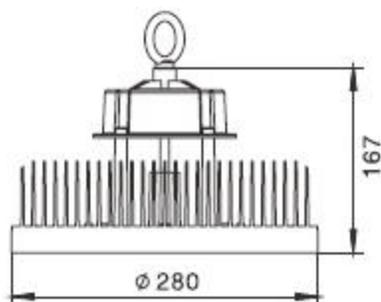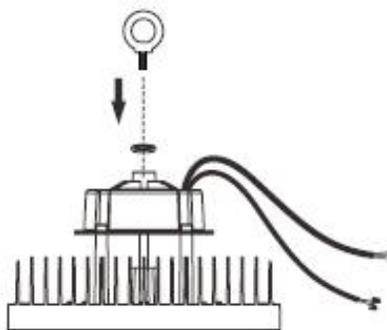

UFO HIGHBAY – 100.242-BND / 100.242-BDA


101.246	200W – 30000LM – 4000K
Beskrivelse	LED UFO
Styring	Non dim / Dali2 / 1-10V
Volt	100-240 V~
LED	Philips Lumileds Luxeon 3030 chip
Watt	200
Spredning	120°
RA	➤ 85
Lumen	30000Lm
Farvetemperatur	4000K
Lyskilde	LED, symmetrisk lysfordeling
Levetid	100.000 timer
L80/B20	>100000 at Ta=25°
Materiale	Die cast aluminium, Sort
Anvendelse	Udendørs/indendørs
IP	65
Yderligere information	Godkendt til at sidde i støvet områder.
Leveres med	1.5m kabel Karabinhage for montering
Garanti	5år



RoHS



5 YEARS WARRANTY

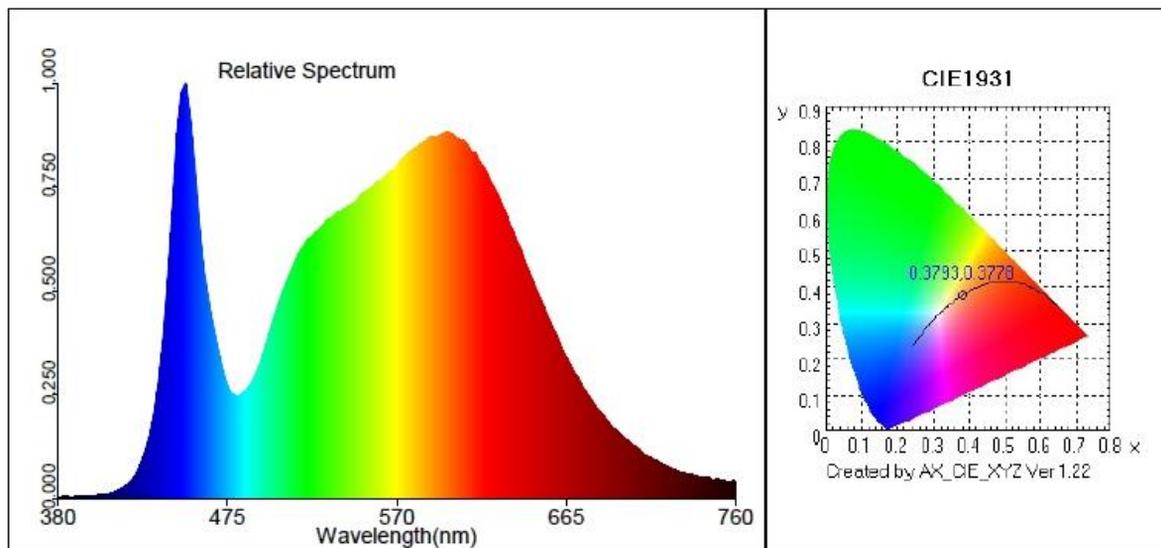

Test Params:

E= 1.3938e+004 lx

E(fc)=1295.39 fc

Ee=0.0000e+000 W/m²

CIE-x= 0.3793

CIE-y= 0.3778

CIE-u'=0.2240

CIE-v'=0.5019

CCT=4038 K

Lp=451.0 nm

HW=22.8 nm

Ld=399.9 nm

Pur=27.2 %

RedRatio(%)=18.4

GreenRatio(%)=78.1

BlueRatio(%)=3.5

DUV=0.0008

S/P=1.70

Ra=84.4

R1=83

R2=89

R3=94

R4=84

R5=83

R6=85

R7=88

R8=69

R9=18

R10=74

R11=83

R12=61

R13=85

R14=96

R15=78

SDCM= 0.9(F4000)









White Class:C78.377_4000K

INSTALLATION MANUAL

UFO Highbay -100W-150W-200W

⚠ Caution:
Switch Off the Power Supply

New Installation

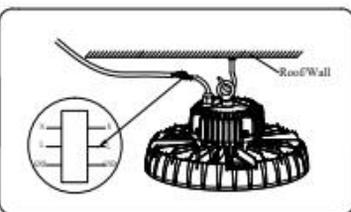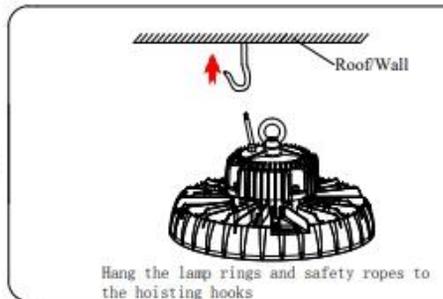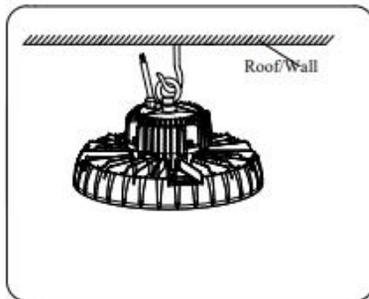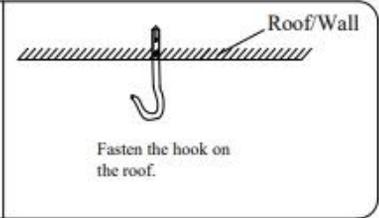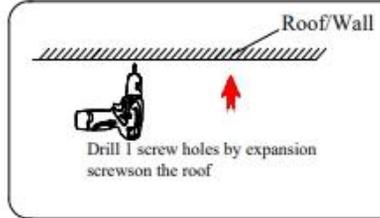

1. To protect the surface of the fixture from scratch, please handle the package with care during the transportation and storage. Do not place heavy item above the package;
2. Do not let the product surface friction with other hard objects or fall on the floor;
3. Make sure the fixture is securely mounted. The connection of all the wires must have insulation protection;
4. The appropriate waterproof measurements are required when connecting the driver externally;
5. Please check the operating voltage range before installation, do not use the luminaire out of the working voltage range.

•MF Energi ApS
•Hinumvej 7
•DK-7200 Grindsted
•Phone: +45 2094 0409
•E-mail: mail@mfenergi.dk

