


UFO HIGHBAY - 100.240-3 step sensor

101.246	150W – 22600LM – 4000K
Beskrivelse	LED UFO
Justerbar styring	3 step sensor-100% - 20% - off
Volt	100-240 V~
LED	Philips Lumileds Luxeon 3030 chip
Watt	150W
Spredning	90°
RA	>82
Lumen	22600Lm
Farvetemperatur	4000K
Lyskilde	LED, symmetrisk lysfordeling
Levetid	100.000 timer
L80/B20	>100000 at Ta=25°
Materiale	Die cast aluminium, Sort
Anvendelse	Indendørs
IP	66
Yderligere information	Godkendt til at sidde i støvet områder.
Leveres med	1.5m kabel Karabinhage for montering
Garanti	5år

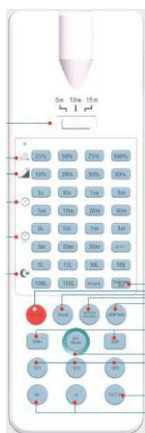



Sensor er forprogrammeret
Ved start 100% lys.
Efter 15min dæmper ned til 20% lys.
Efter yderlig 5min slukkes lyset helt.

Dette kan ændres med en fjernbetjening fra MF Energi inden afsendelse.



Beaded lens

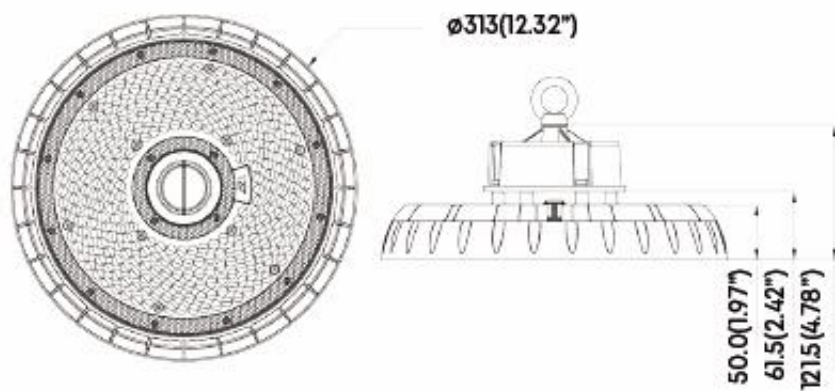

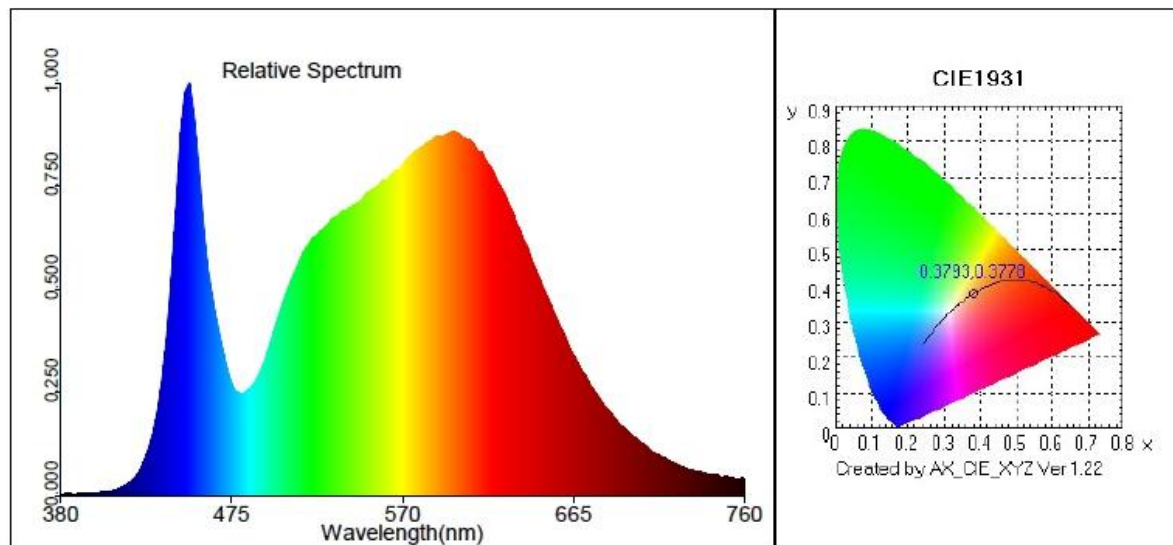

Test Params:

E= 1.3938e+004 lx

E(fc)=1295.39 fc

Ee=0.0000e+000 W/m2

CIE-x= 0.3793

CIE-y= 0.3778

CIE-u'=0.2240

CIE-v'=0.5019

CCT=4038 K

Lp=451.0 nm

HW=22.8 nm

Ld=399.9 nm

Pur=27.2 %

RedRatio(%)=18.4

GreenRatio(%)=78.1

BlueRatio(%)=3.5

DUV=0.0008

S/P=1.70

Ra=84.4

R1=83

R2=89

R3=94

R4=84

R5=83

R6=85

R7=88

R8=69

R9=18

R10=74

R11=83

R12=61

R13=85

R14=96

R15=78

SDCM= 0.9(F4000)

White Class:C78.377_4000K










INSTALLATION MANUAL

UFO HIGHBAY -100W-150W-200W

⚠ Caution:

Switch Off the Power Supply

New Installation

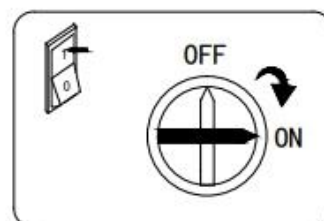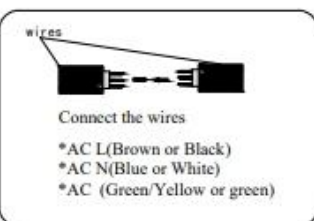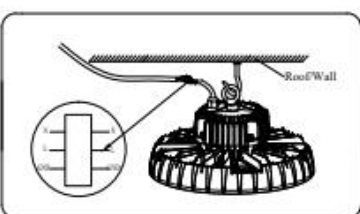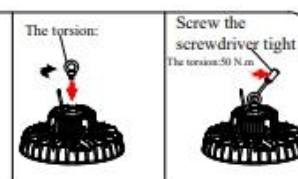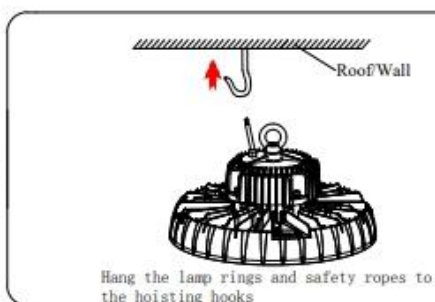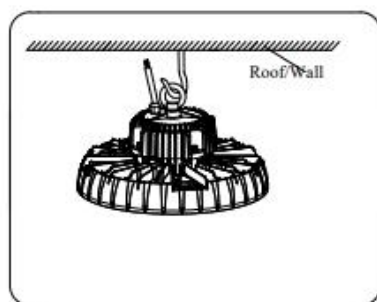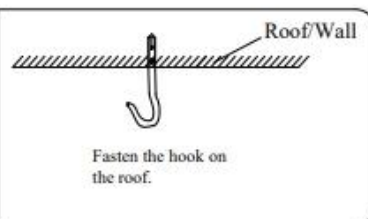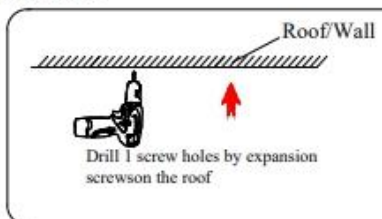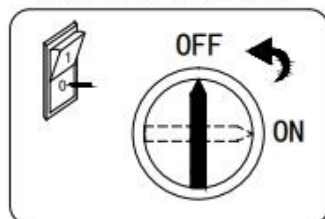


1. To protect the surface of the fixture from scratch, please handle the package with care during the transportation and storage. Do not place heavy item above the package;
2. Do not let the product surface friction with other hard objects or fall on the floor;
3. Make sure the fixture is securely mounted. The connection of all the wires must have insulation protection;
4. The appropriate waterproof measurements are required when connecting the driver externally;
5. Please check the operating voltage range before installation, do not use the luminaire out of the working voltage range.

•MF Energi ApS
 •Hinumvej 7
 •DK-7200 Grindsted
 •Phone: +45 2094 0409
 •E-mail: mail@mfenergi.dk



INSTALLATION MANUAL

UFO Highbay -100W-150W-200W

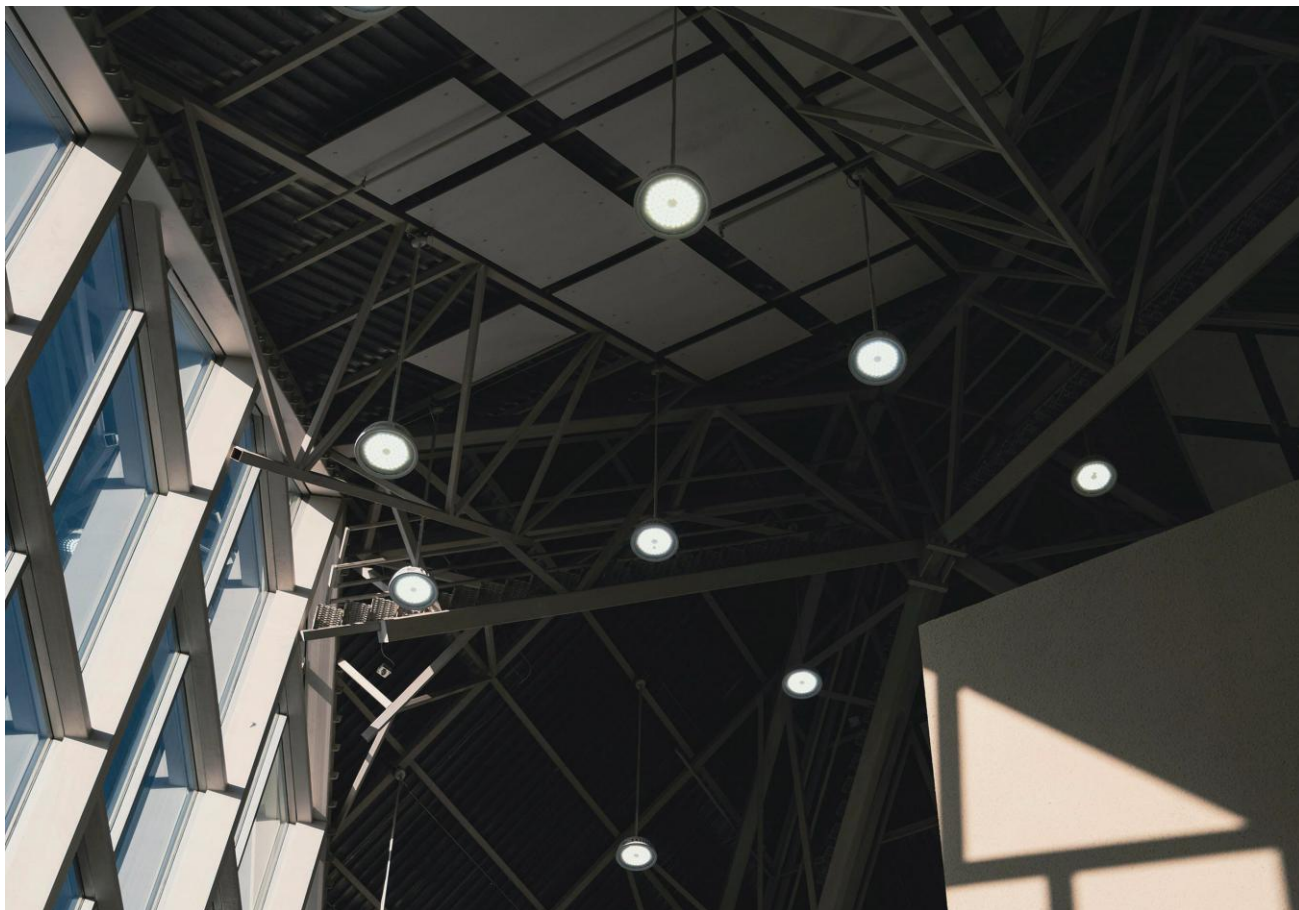

- MF Energi ApS
- Hinumvej 7
- DK-7200 Grindsted
- Phone: +45 2094 0409
- E-mail: mail@mfenergi.dk